

BCMA Series

Common Mode Filters For Automotive Signal Line/Power Line Size 9030






FEATURES

- High common mode impedance at high frequency cause excellent noise suppression performance
- Designed to be low profile and Supports large currents (up to 6 A)
- Operating temperature range: -40 to +125°C(including self-temperature rise)
- AEC-Q200 qualified
- Quantity: 2000pcs


APPLICATION

- Headlamps, tail lamps and interior lighting
- HVAC
- Doors, window lift and seat control
- Audio subsystem
- Digital instrument cluster
- In-Vehicle Infotainment and navigation


Dimensions: [mm]



Schematic:



Land Pattern: [mm]


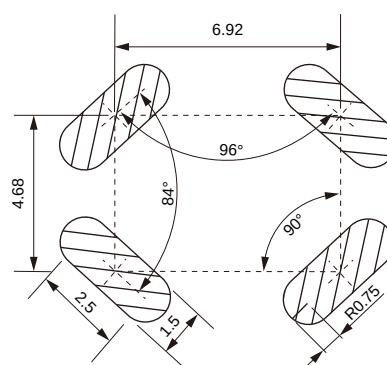


Electrical Properties:


Part No	Inductance @100KHz/0.1V Min. 1-2=4-3	Leakage Inductance @100KHz/0.1V Typ.	Temperature Rise Current Max. 1-2=4-3	DC Resistance Typ. 1-2=4-3	DC Resistance Max. 1-2=4-3	Hi-Pot 3mA/1S 1,2-3,4
BCMA9030-4R5Y	4.50	0.05	5.5	9	15	500
BCMA9030-120Y	12.6	0.14	4.1	12	20	500

Temperature Rise Current: The actual value of DC current when the temperature rise is $\Delta T=40^{\circ}\text{C}$

Typical Electrical Characteristics:

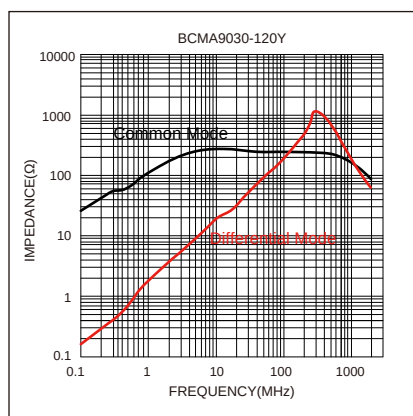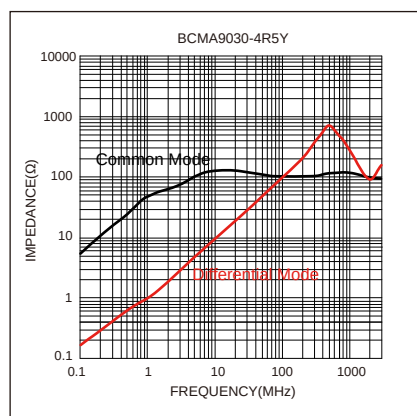


Peel force of top cover tape:

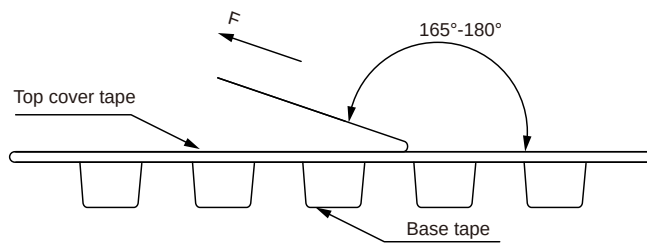


The peel force of top cover tape shall be between 0.20 to 1.17 N

Reel Dimension: [mm]

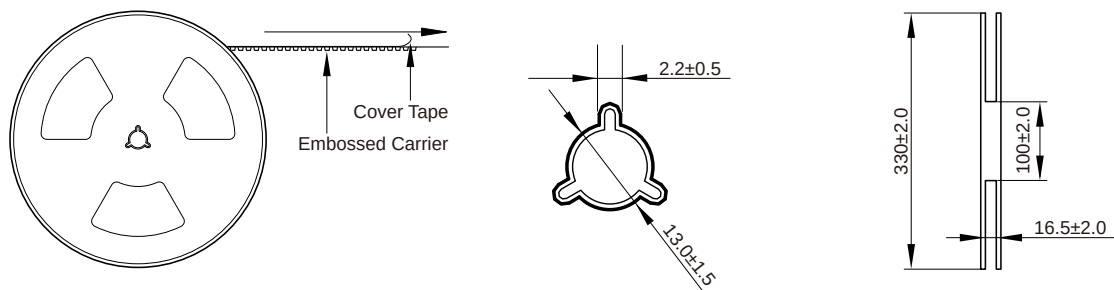

Packaging Quantity:

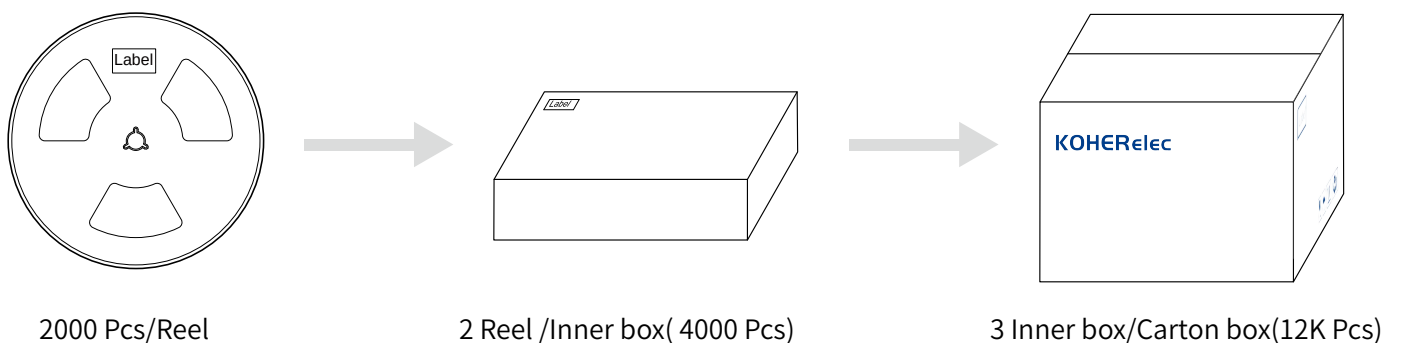

Cautions and Warnings:

Storage Conditions:

- The storage period is within 12 months after the completion of production. Be sure to follow the storage conditions (temperature: -5 to 35°C, humidity: 75% RH Max). If the storage period elapses, the soldering of the terminal electrodes may deteriorate. The warranty period is one year.
- Product should not be exposed to environment with high temperature, high humidity, dust, corrosive gas and etc.
- Products should be handled with care to avoid damage or contamination from perspiration and skin oils.
- Please always handle products carefully to prevent any damage caused by dropping down or inappropriate removing.

Operation Instructions:

-
-
-
-