

FBE Series




CHARACTERISTICS

-
-
-
-
-

APPLICATION

-
-












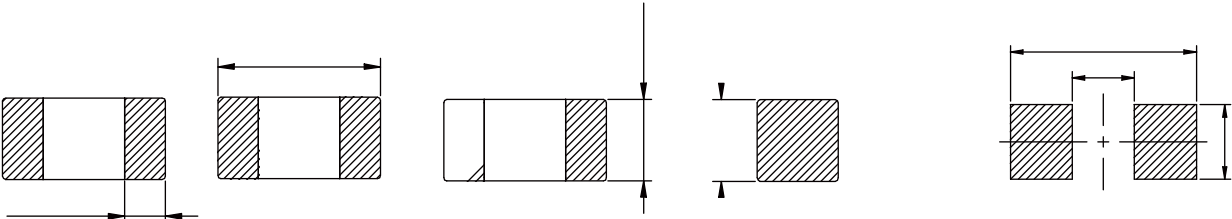



	200 250 315 (Ω)	250 315 400 500	250 315 400 (max) (Ω)	250 315 400 500 630 800 1000 Current (max) (mA)


℃

℃

℃

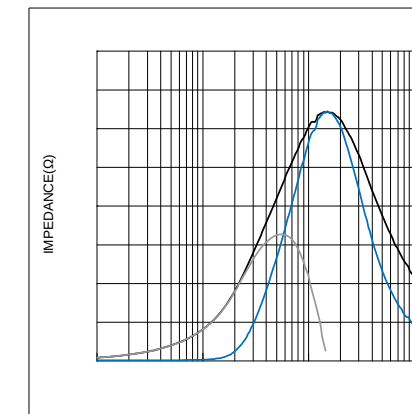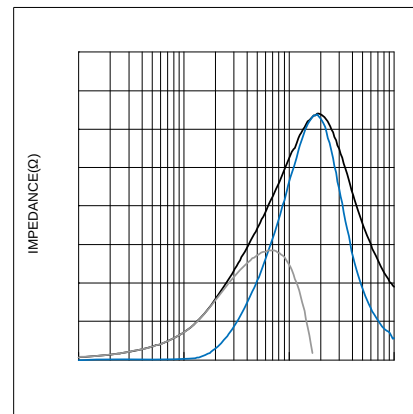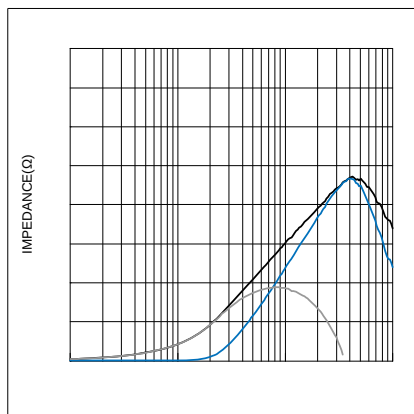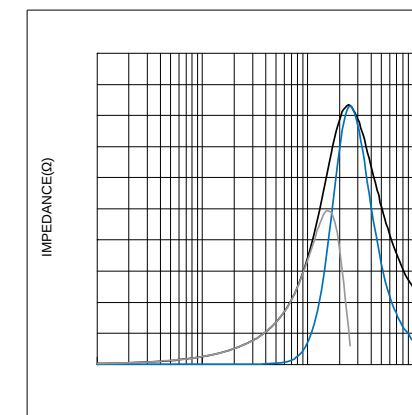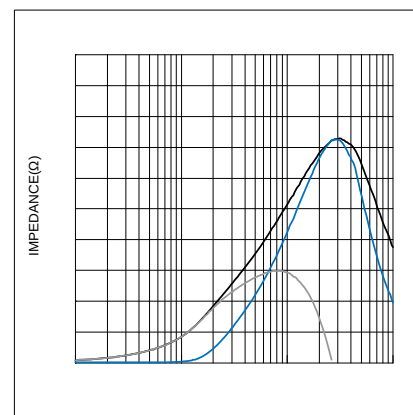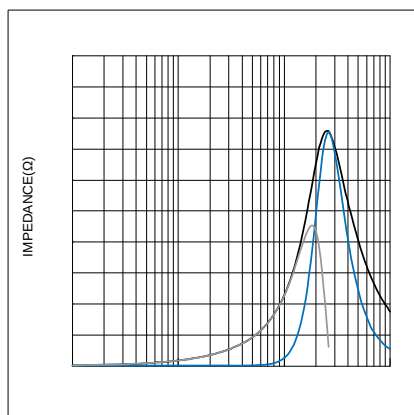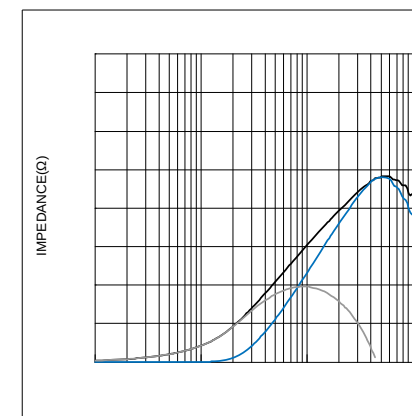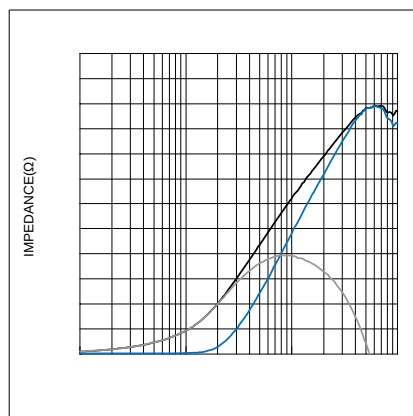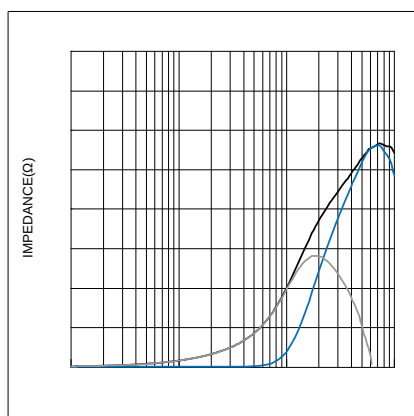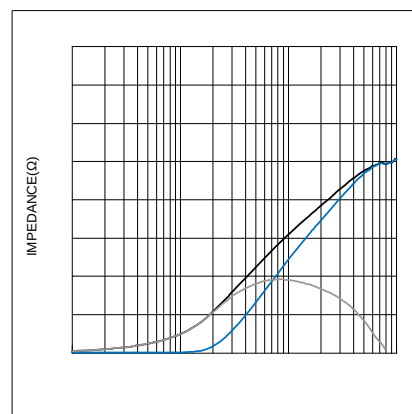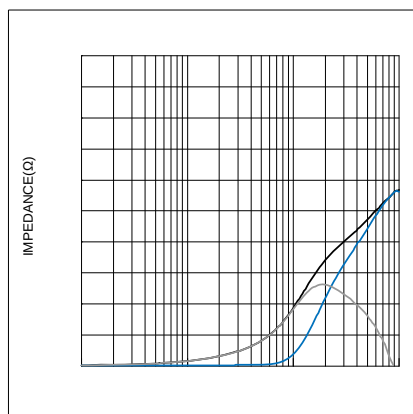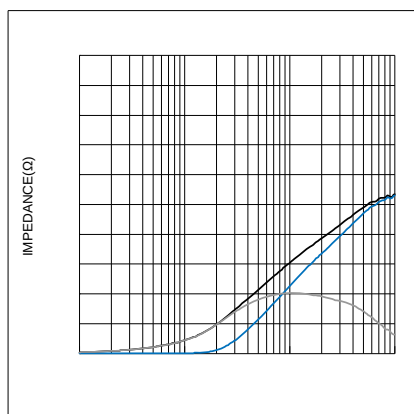


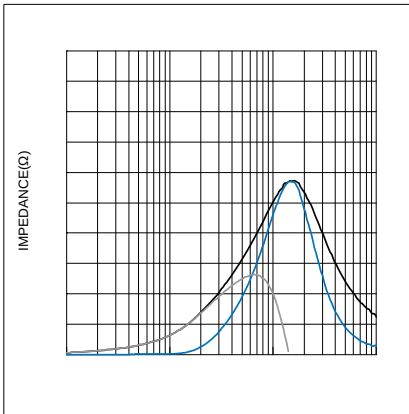

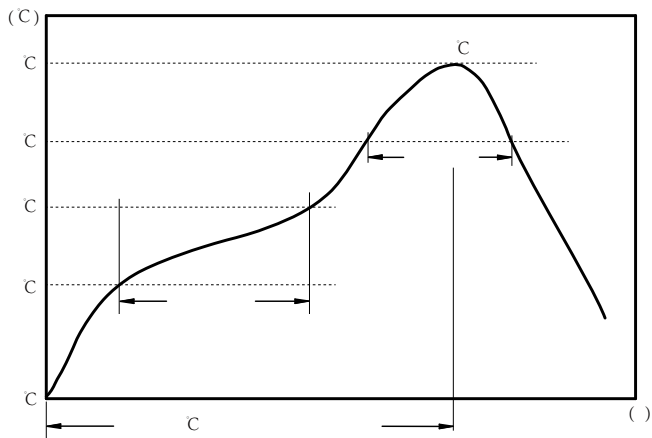


C
C
C



:

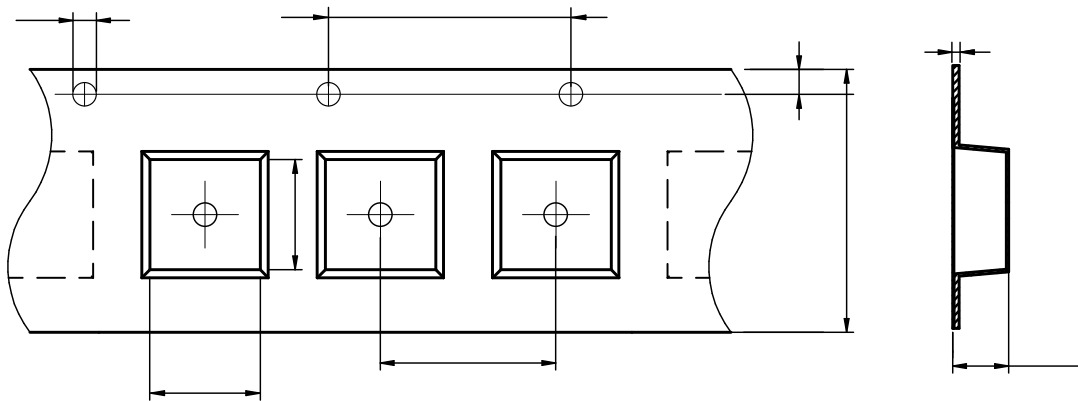

FBE0402	0.62 ± 0.03	1.12 ± 0.03	1.5 ± 0.1	4.0 ± 0.1	4.0 ± 0.1	8.0 ± 0.3	0.60 ± 0.03	1.75 ± 0.1	0.60 ± 0.03

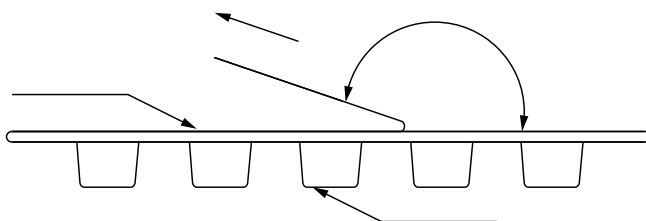

The peel force of top cover tape shall be between 0.14 to 0.58 N

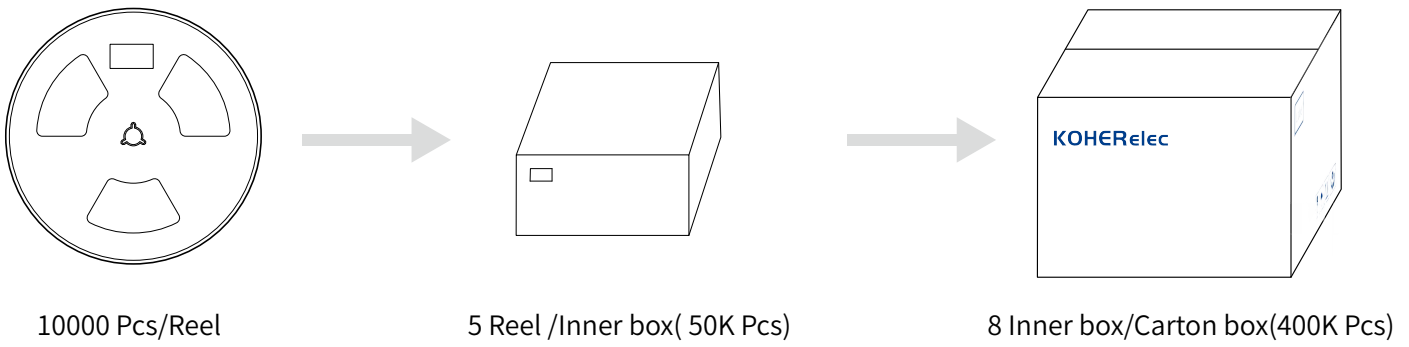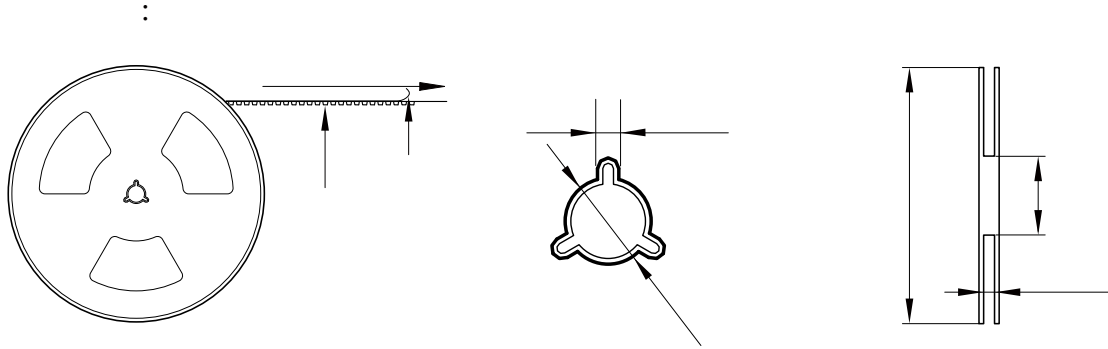

:

-
-
-
-
-
-
-
-

