

FBHA Series




FEATURES

- Noise reduction solution for power line.
- Compared to the FBA series, has low direct current resistance for compatibility with large currents, optimal for low power consumption. Various frequency characteristics with 2 materials of different features for countermeasures against everything from general signals to high-speed signals.
- Performs well even in signal lines where low direct current resistance is required.
- AEC-Q200 qualified.
- Operating temperature: -55 to +150 °C (including self-temperature rise)
- Quantity: 10000PCS


APPLICATION


- Power line filter for body controls, and car multimedia etc.

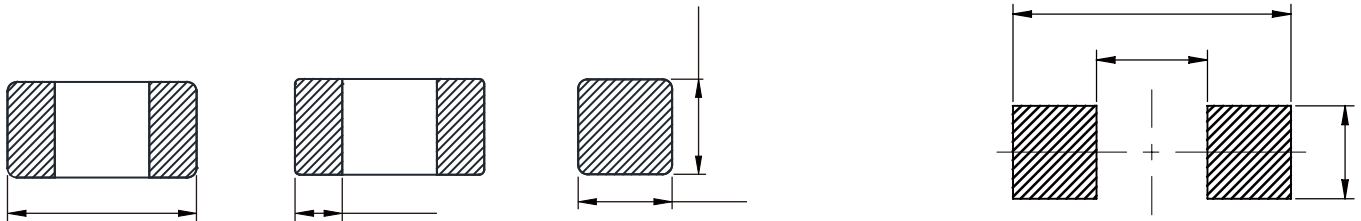

	(Ω)		(Ω)	(mA)
FBHA0402-100-202R	10	$\pm 25\%$	0.100	2000
FBHA0402-100-252R	10	$\pm 25\%$	0.050	2500
FBHA0402-330-302R	33	$\pm 25\%$	0.022	3000
FBHA0402-600-252R	60	$\pm 25\%$	0.032	2500
FBHA0402-800-232R	80	$\pm 25\%$	0.038	2300
FBHA0402-121-202R	120	$\pm 25\%$	0.095	2000
FBHA0402-221-152R	220	$\pm 25\%$	0.150	1500


I_R referring to 40K self-heating above ambient temperature

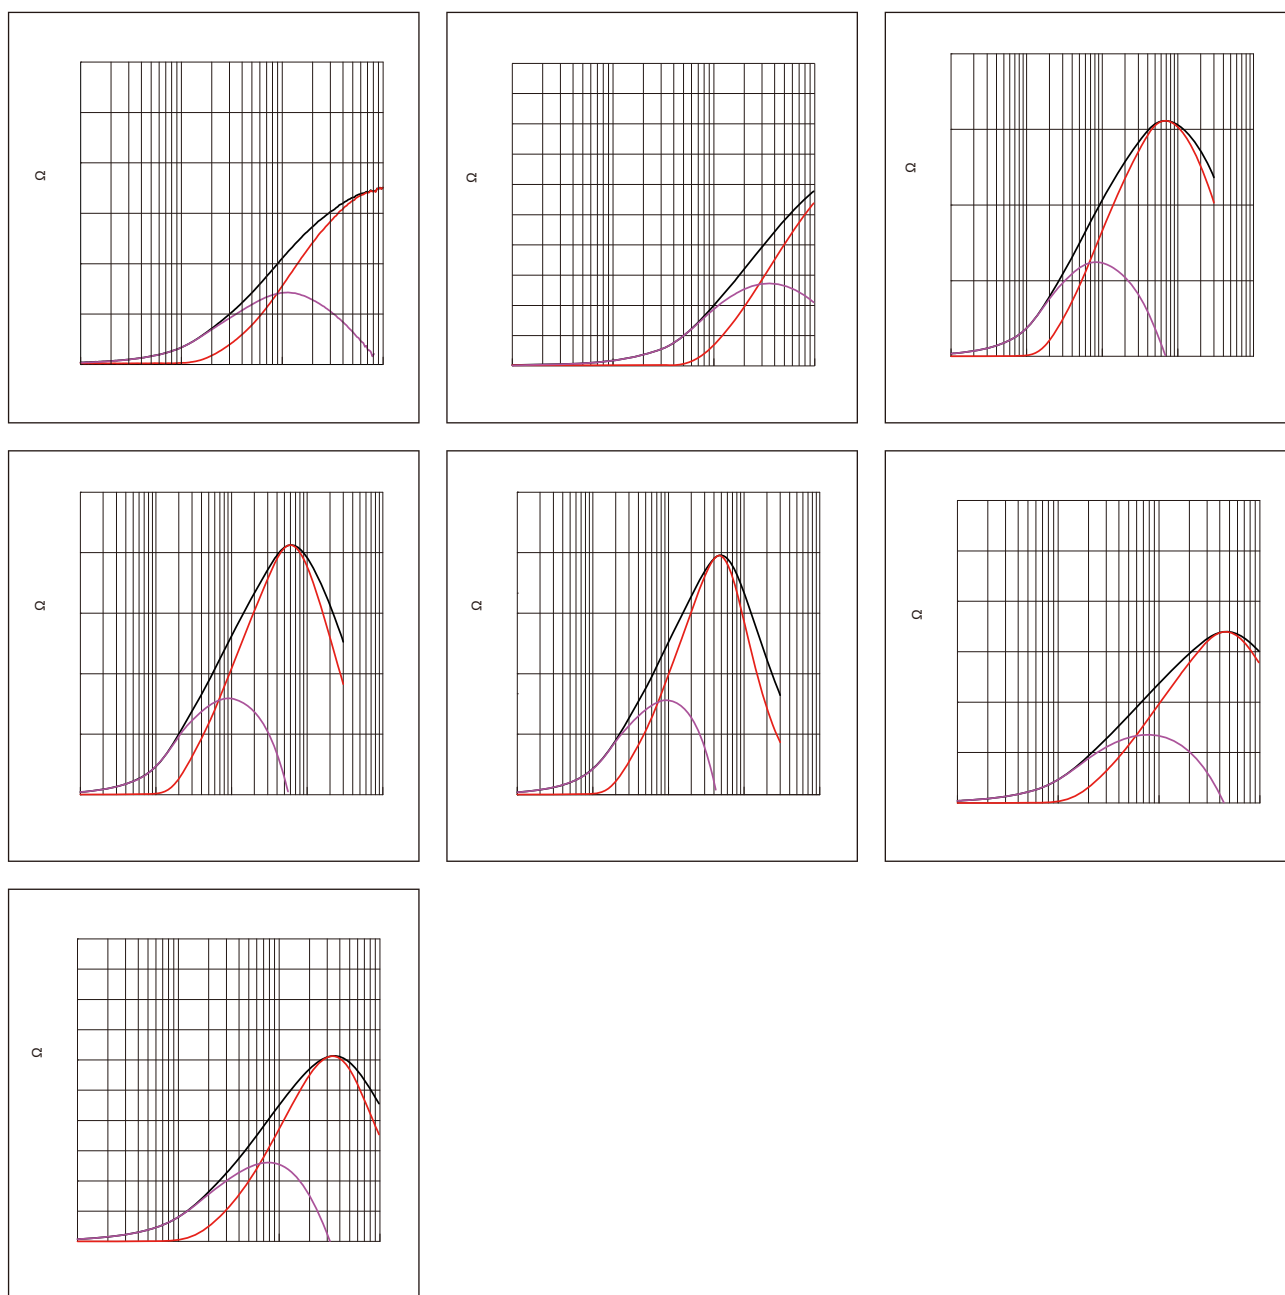

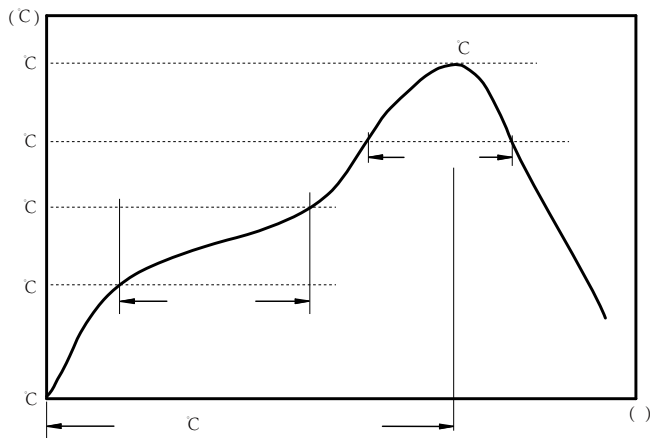


C
C
C

:


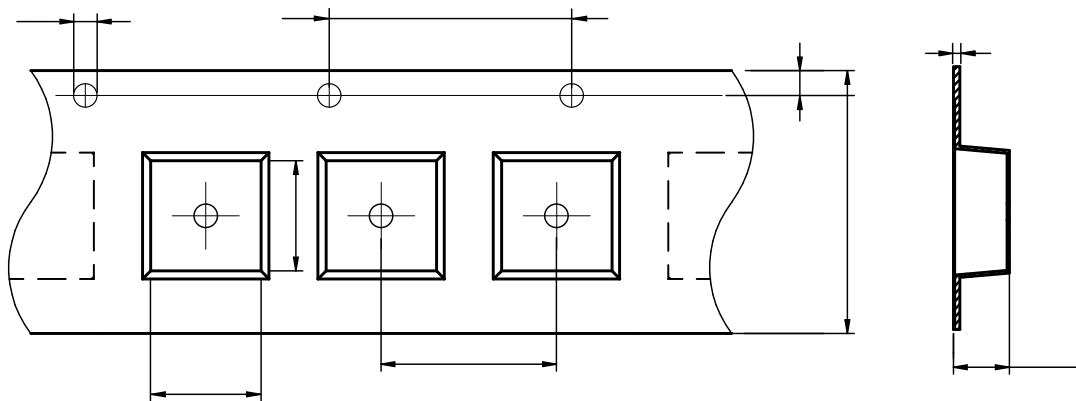


FBHA0402	0.62 ± 0.03	1.12 ± 0.03	1.5 ± 0.1	4.0 ± 0.1	2.0 ± 0.05	8.0 ± 0.3	0.60 ± 0.03	1.75 ± 0.1	0.60 ± 0.03

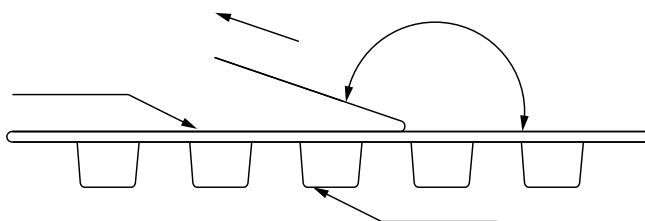


The peel force of top cover tape shall be between 0.14 to 0.58 N


:

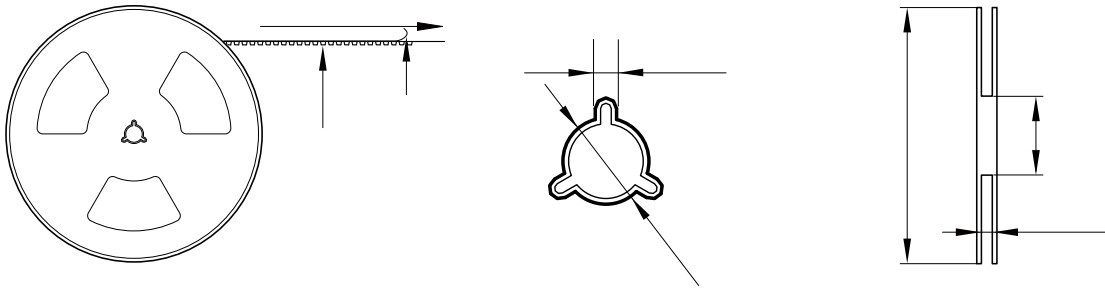

10000 Pcs/Reel



5 Reel /Inner box(50K Pcs)



8 Inner box/Carton box(400K Pcs)

:

•

•

•

•

•

•

•

•