

MDE Series

Molding Power Inductors

Size 1240


FEATURES

-
-
- $^{\circ}\text{C}$ maximum total temperature operation
-
- Ultra low buzz noise due to molding construction
-
- Operating temperature range - 55°C to $+125^{\circ}\text{C}$
- Quantity: 500pcs


APPLICATION

- Laptops and PCs
-
- Base stations
- DC/DC converters
- Battery powered devices
-

Dimensions: [mm]

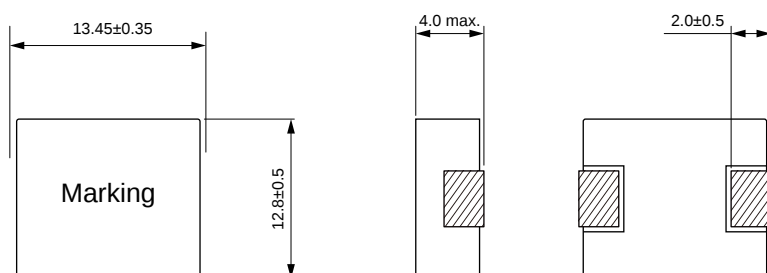

Land Pattern: [mm]




Electrical Properties:

	Tolerance	DC Resistance Max.	Current Typ. (A)	Temperature Rise Current Typ. (A)	
	±20%	0.90	50.0	42.0	3.85±0.5
	±20%	2.00	48.0	33.0	3.85±0.5
	±20%	3.50	47.0	28.0	5.00±0.3
	±20%	4.50	40.0	28.0	5.00±0.3
	±20%	7.50	35.0	24.0	5.00±0.3
	±20%	9.50	30.5	20.0	5.00±0.3
	±20%	11.5	26.0	18.0	5.00±0.3
	±20%	13.0	21.0	15.0	5.00±0.3
	±20%	14.5	18.0	13.0	5.00±0.3
	±20%	20.0	14.0	9.00	5.00±0.3
	±20%	25.0	10.0	8.00	5.00±0.3
	±20%	39.0	7.50	6.50	5.00±0.3
	±20%	51.0	6.00	4.50	5.00±0.3

Typical Electrical Characteristics:

Inductance vs DC Current Characteristics:

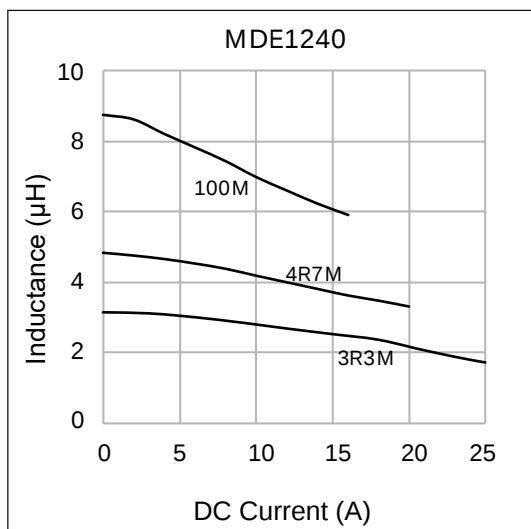

Temperature Rise vs DC Current Characteristics:

