






MDSA Series

FEATURES

-
-
-
-
-
-
-
-

APPLICATION


-
-
-





Part No	Inductance @ 100KHz/1V (μH)	Tolerance	Temperature Rise Current Typ. (A)	Satura on Current Typ. (A)	DC Resistance Typ. (mΩ)	DC Resistance Max. (mΩ)	E

Part No	Inductance @ 100KHz/1V (μH)	Tolerance	Temperature Rise Current Typ. (A)	Satura on Current Typ. (A)	DC Resistance Typ. (mΩ)	DC Resistance Max. (mΩ)	E


△

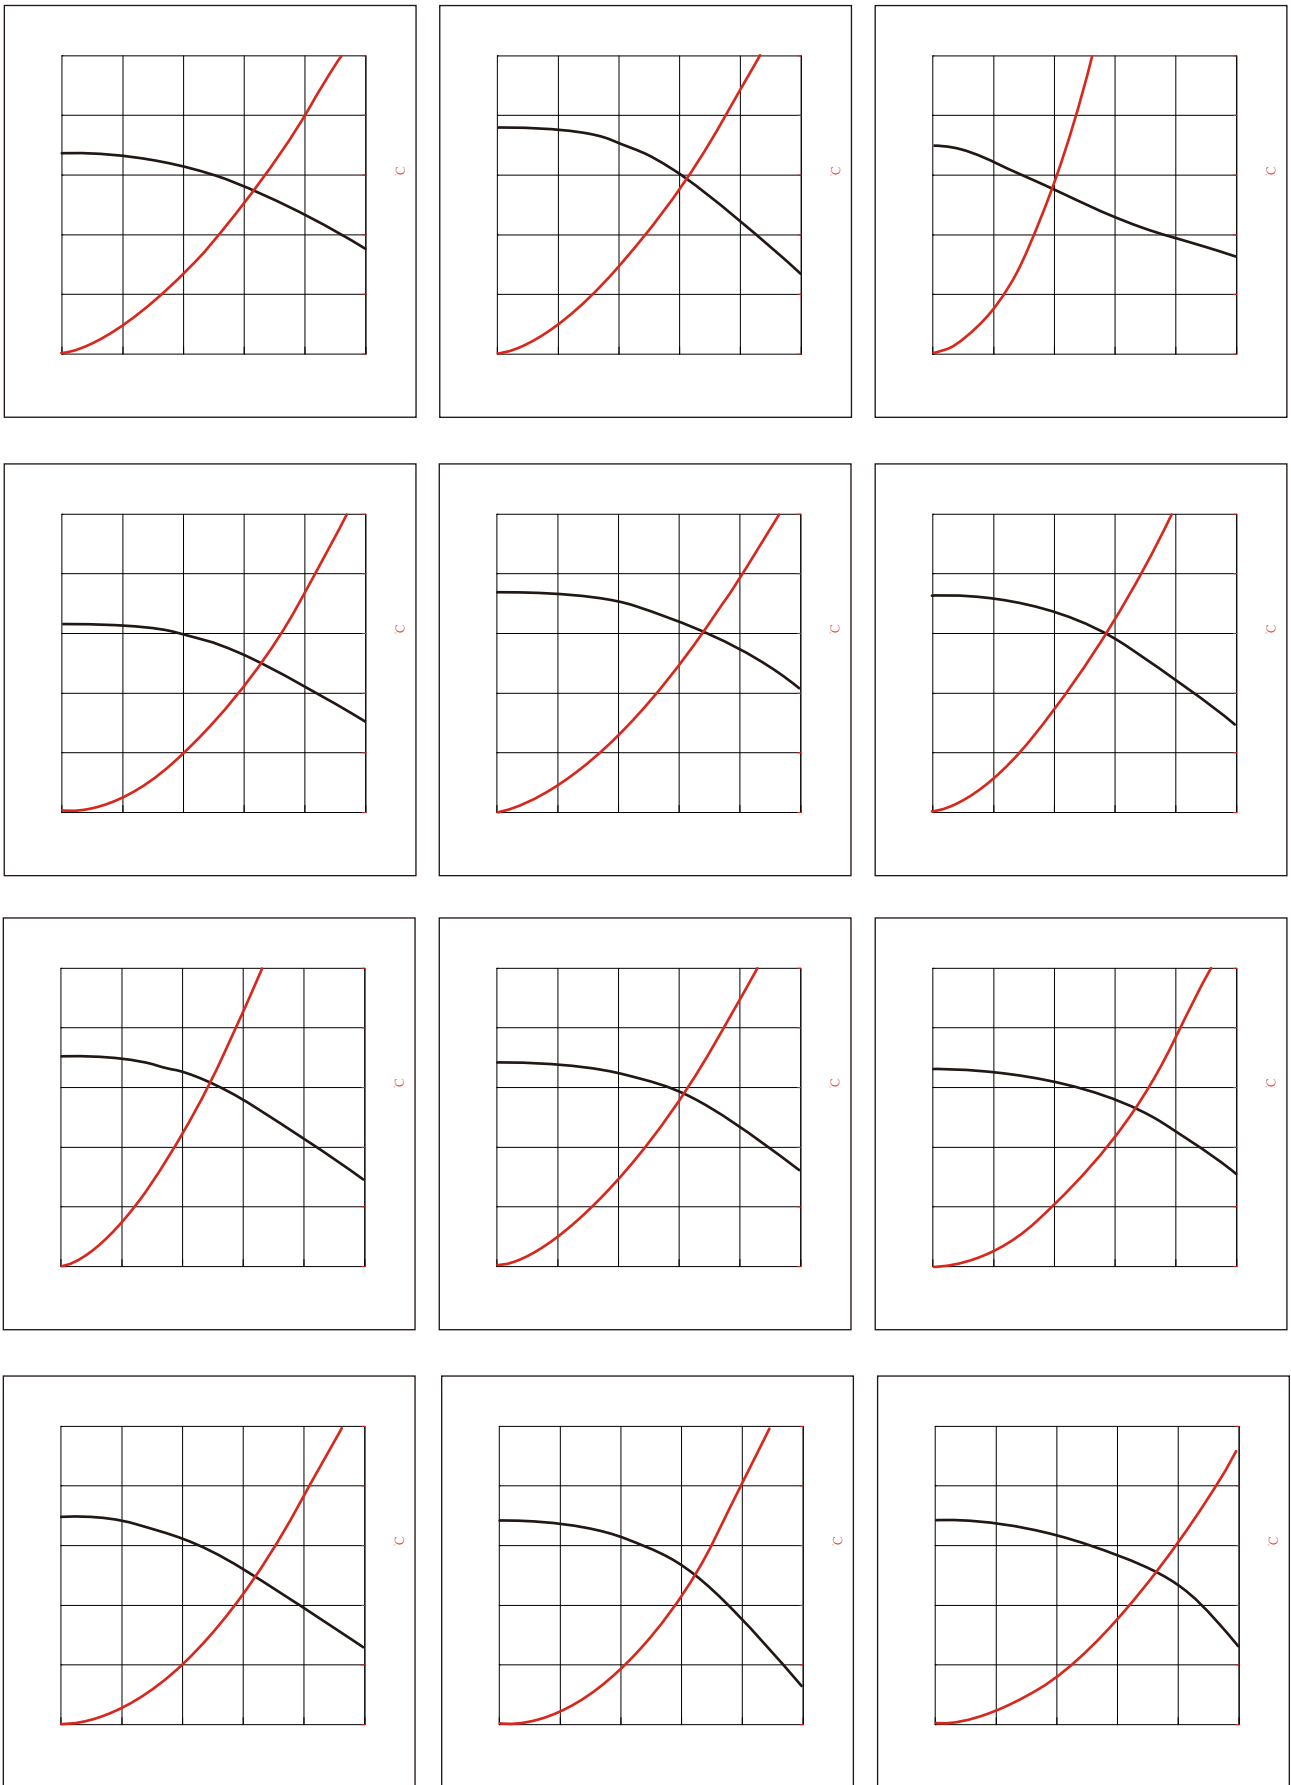

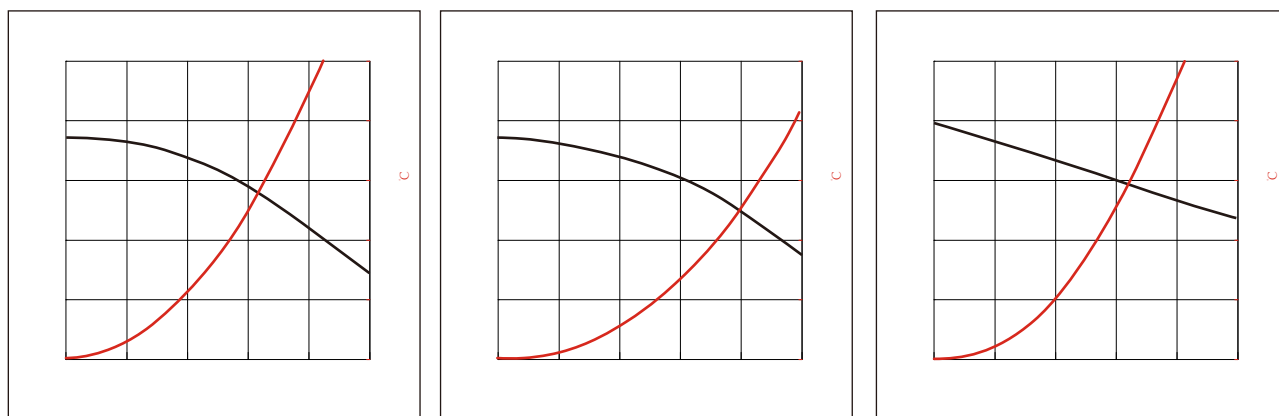


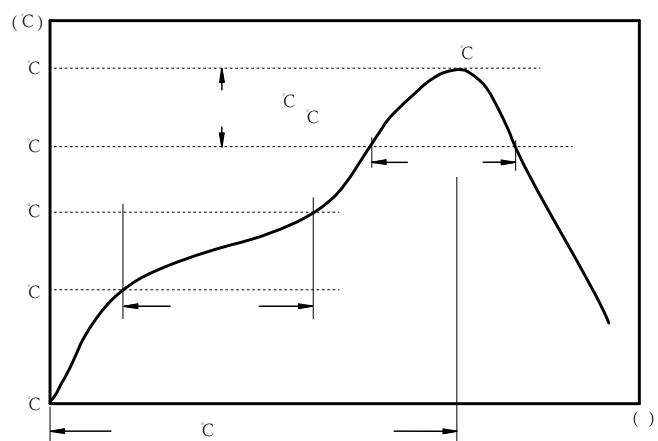

:



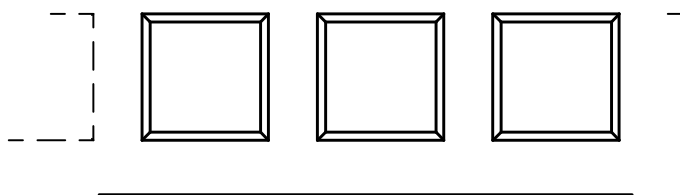


MDSA1040	10.4 ± 0.1	11.6 ± 0.1	1.5 ± 0.1	4.0 ± 0.1	16.0 ± 0.1	24.0 ± 0.3	4.3 ± 0.1	1.75 ± 0.1	0.35 ± 0.05

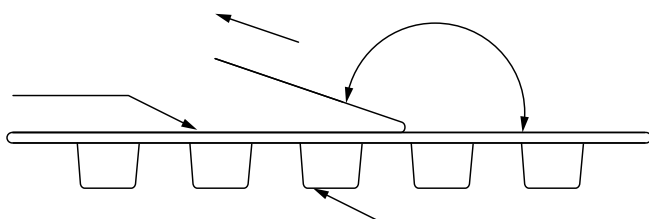

The peel force of top cover tape shall be between 0.1 to 1.3 N

Marking	KH+Printing Inductance+period)
---------	--------------------------------

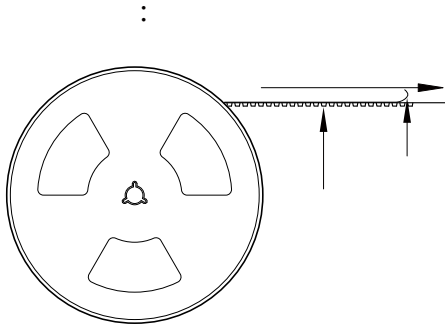

500 Pcs/Reel

2 Reel /Inner box(1000 Pcs)

3 Inner box/Carton box(3K Pcs)

: