

MDTE Series




FEATURES

-
-
-
-
-
-
-

°C


APPLICATION

-
-

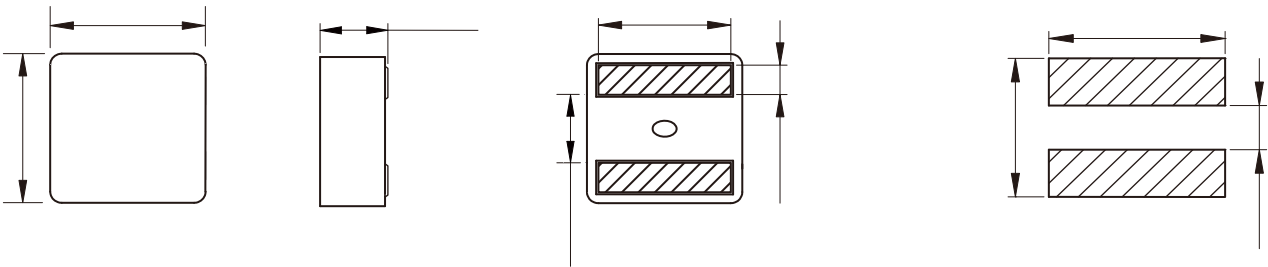


	⌀	⌀	K	⌀
	⌀	⌀	K	⌀
	K	⌀	⌀	⌀
ToleranceDd	⌀	⌀	K	K
Dd	⌀	⌀	⌀	⌀
Dd	⌀	⌀	⌀	⌀
Dd	⌀	⌀	⌀	⌀
Dd	⌀	⌀	⌀	K
Dd	K	⌀	⌀	⌀
Dd	K	⌀	⌀	K
Dd	⌀	⌀	K	⌀



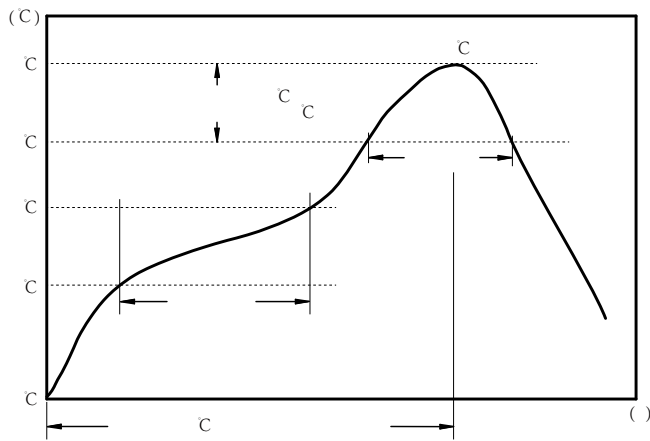


C
C
C

:



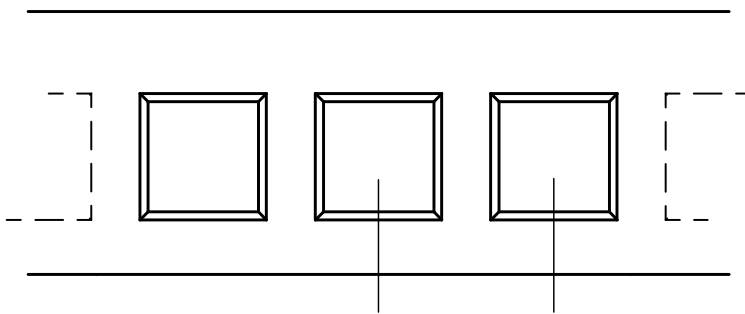


MDTE5020	6.0 ± 0.1	5.7 ± 0.1	1.5 ± 0.1	4.0 ± 0.1	8.0 ± 0.1	12.0 ± 0.3	2.3 ± 0.1	1.75 ± 0.1	0.35 ± 0.05

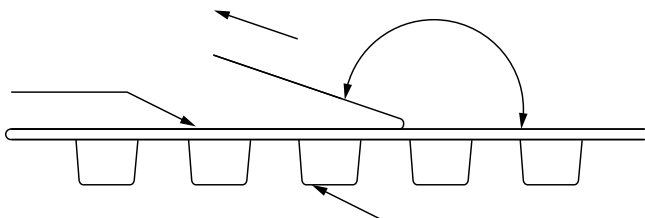

The peel force of top cover tape shall be between 0.1 to 1.3 N


Marking	Printing Inductance)
---------	----------------------

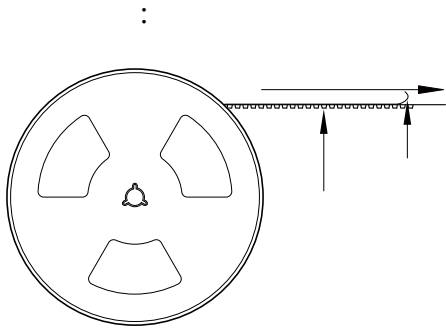

3000 Pcs/Reel



3 Reel /Inner box(9000 Pcs)



3 Inner box/Carton box(27K Pcs)

:

•

•

•

•

•

•

•

•