






.....


°C




Part No	Inductance @ 100KHz/0.1V (μ H)	Tolerance	Saturation Current Typ. (A)	Saturation Current Max. (A)	Temperature Rise Current Typ. (A)	DC Resistance Max. (m Ω)	D (mm)

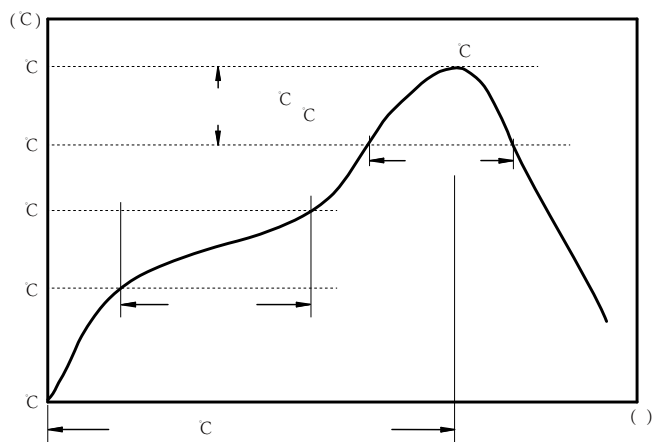

C
C
C



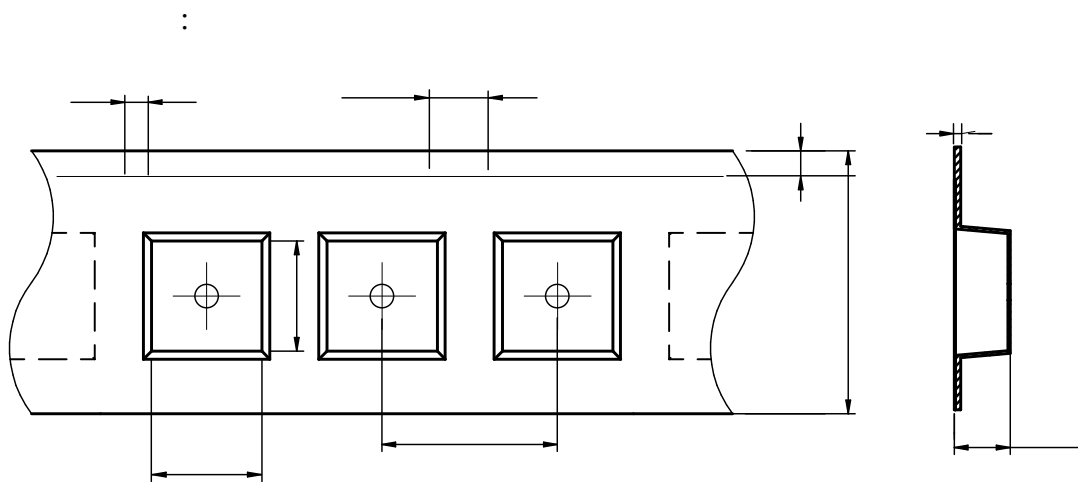


MDTE6050	7.0 ± 0.1	6.8 ± 0.1	1.5 ± 0.1	4.0 ± 0.1	12.0 ± 0.1	16.0 ± 0.3	5.3 ± 0.1	1.75 ± 0.1	0.35 ± 0.05

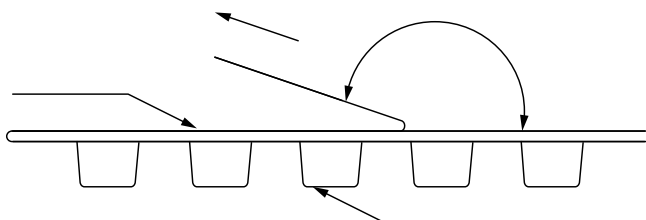

The peel force of top cover tape shall be between 0.1 to 1.3 N


Marking	Printing (Inductance)
---------	-----------------------

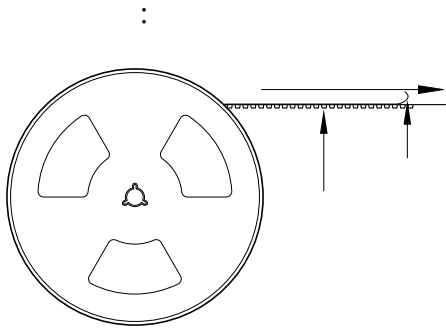

800 Pcs/Reel



2 Reel /Inner box(1600 Pcs)



3 Inner box/Carton box(4.8K Pcs)

:

•

•

•

•

•

•

•

•