

Part No	Inductance (μ H)	Tolerance	Saturation Current (A)	Temperature Rise Current (A)	DC Resistance $\pm 30\%$ (m Ω)	Test Condition


°C

°C


°C

Typical Electrical Characteristics:

Inductance VS. Current Characteristics:

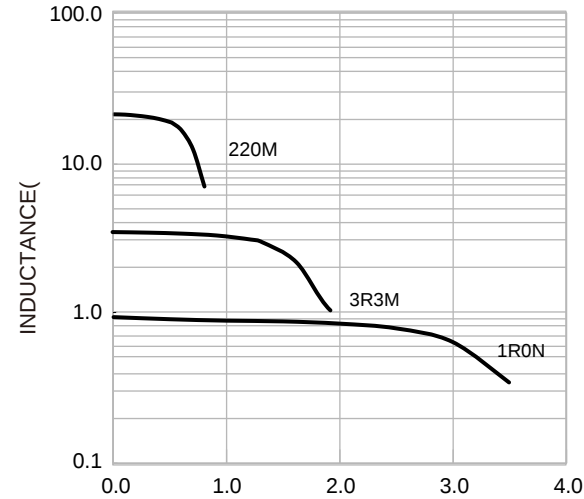

Temperature Rise VS. Current Characteristics:

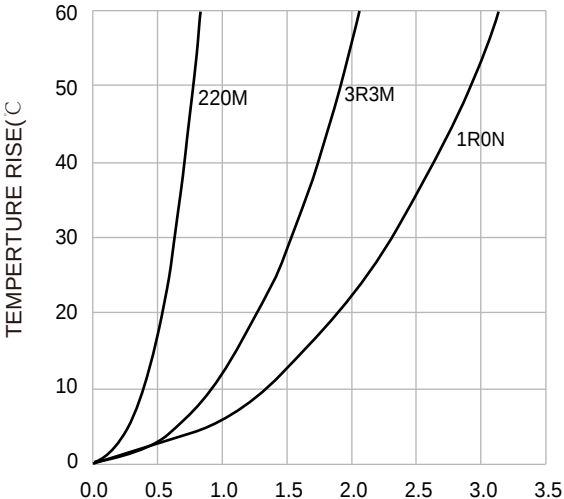

Soldering Reflow:




Packaging Information:

Tape Dimension :




Series	A0	B0	D	P0	P1	W	K0	E	T
NRSE3015	3.30±0.1	3.30±0.1	1.50±0.1	4.00±0.1	4.00±0.1	8.00±0.3	1.90±0.1	1.75±0.1	0.25±0.1

Peel force of top cover tape:

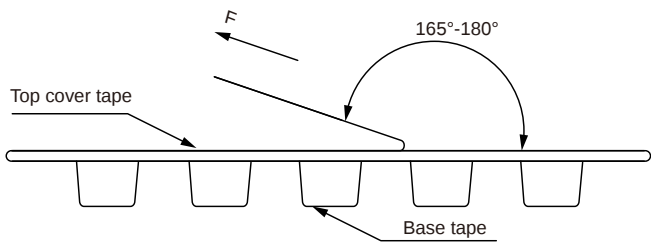


The peel force of top cover tape shall be between 0.14 to 0.88 N

Reel Dimension: [mm]

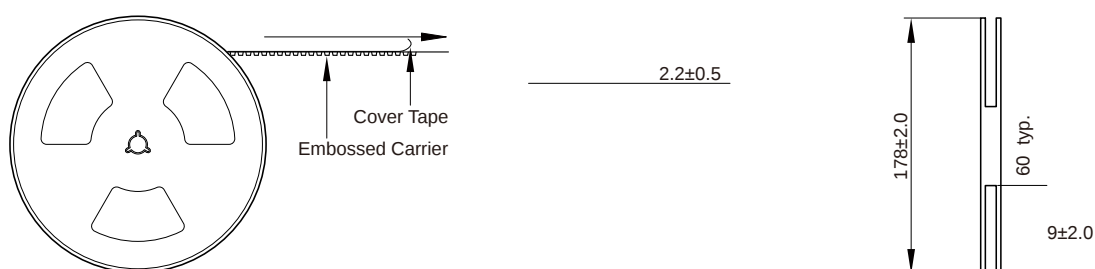

Packaging Quantity:



2000 Pcs/Reel

5 Reel /Inner box(10K Pcs)

8 Inner box/Carton box(80K Pcs)

Cautions and Warnings:

Storage Conditions :

Operation Instructions: