

## SCM Series







## FEATURES

- ☐ ☐ ☐ ☐



<sup>o</sup>C

## APPLICATIONS

- • • •

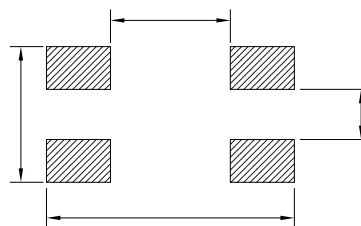

| Part No        | Impedance<br>@ 100 MHz | Tolerance | DC Resistance<br>Max. | Rated Current<br>Max. | Rated Volt<br>Max. | Withstand Volt<br>Max. | IR<br>Min. |
|----------------|------------------------|-----------|-----------------------|-----------------------|--------------------|------------------------|------------|
| SCM3225-900-10 | 90                     | ±25%      | 0.05                  | 1000                  | 50                 | 125                    | 10         |
| SCM3225-601-10 | 600                    | ±25%      | 0.20                  | 1000                  | 50                 | 125                    | 10         |
| SCM3225-102-04 | 1000                   | ±25%      | 0.30                  | 400                   | 50                 | 125                    | 10         |

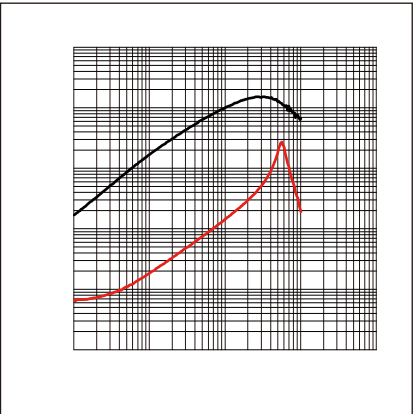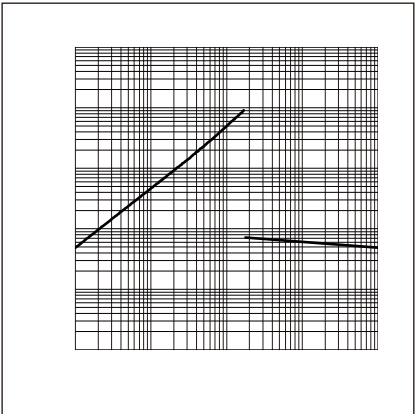

:

•

•

•

•

•

•

•

•

•

•

•

•

•