

SCM Series




FEATURES

-
-
-
-
-


C


APPLICATIONS

-
-
-
-
-

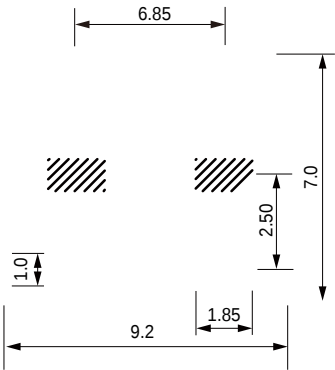


Part No	Inductance @ 100KHz/0.1V (μH) 1-6=2-5=3-4	Tolerance	DC Resistance Max. (Ω) 1-6=2-5=3-4	Rated Current Max. (mA) 1-6=2-5=3-4	Insulation Test Voltage Max.	Leakage Inductance @1MHz/1mA Typ. (nH)	Rated Voltage Typ. (V)	Peak Impedance Typ. (Ω)
SCM9035-101Y	100	+50%/-30%	0.45	450	500 V(AC)	94	80	3000

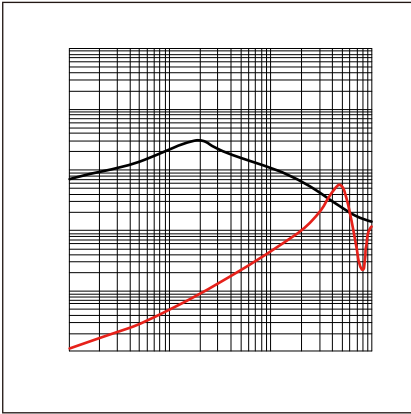

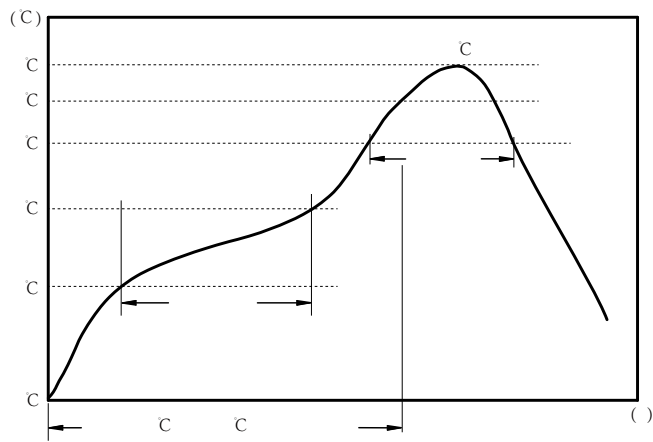


C
C
C

:

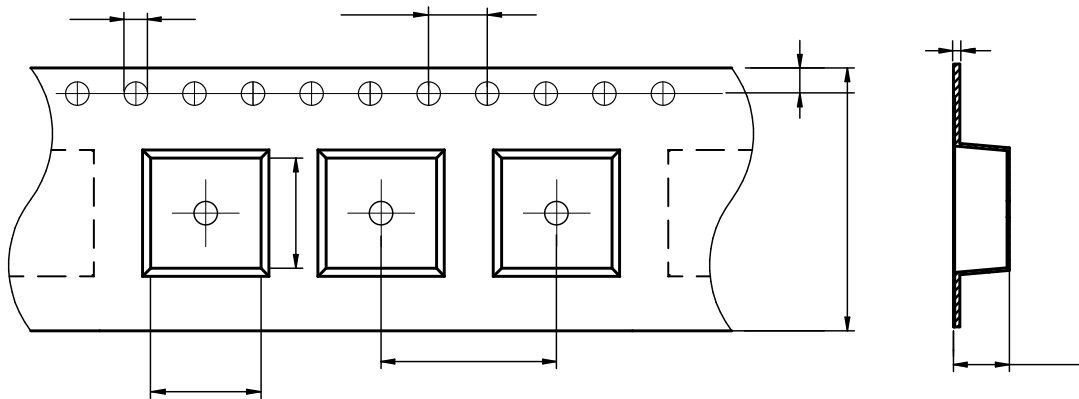





SCM9035	6.90 ± 0.1	9.30 ± 0.1	1.5 ± 0.1	4.0 ± 0.1	12.0 ± 0.1	16.0 ± 0.3	3.8 ± 0.1	1.75 ± 0.1	0.40 ± 0.05

Marking	Printing (Inductance)
---------	-----------------------

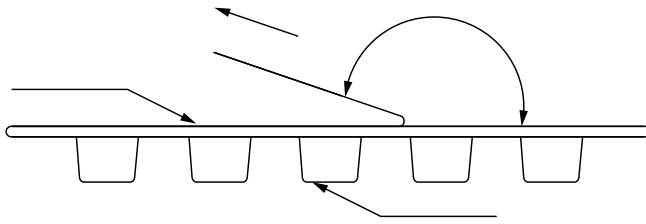


The peel force of top cover tape shall be between 0.2 to 1.17 N


:

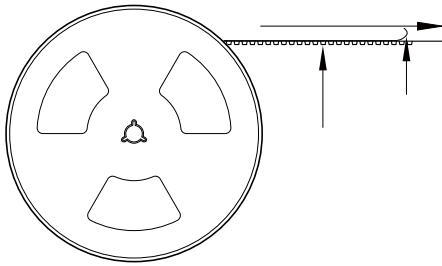

1500 Pcs/Reel



3 Reel /Inner box(4500 Pcs)



3 Inner box/Carton box(13.5K Pcs)

:

•

•

•

•

•

•

•

•

•

•

•

•

•