

SCM Series











FEATURES


- Suppression of asymmetrical interference coupled in on lines, whereas data signals up to some MHz can pass unaffectedly
- Low profile design makes it optimal for surface mounting Excellent impedance characteristics, making it great for suppressing common mode noise.
- Operating temperature: -40°C to +85°C
- Quantity: 1500pcs

APPLICATION


- CAN bus, FlexRay system

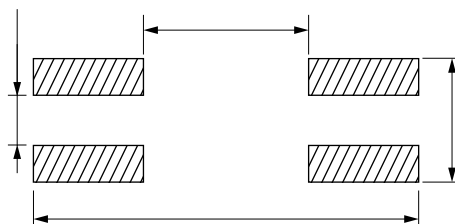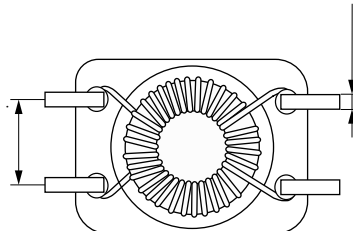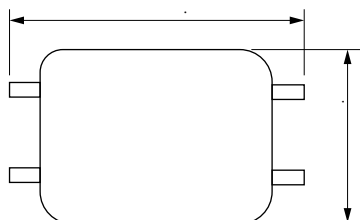

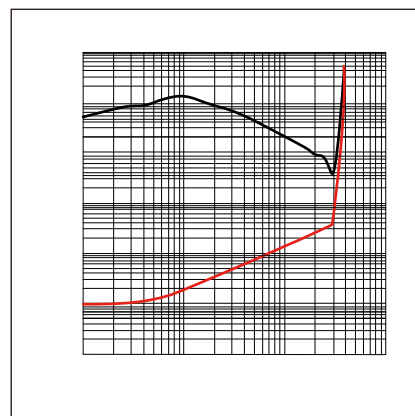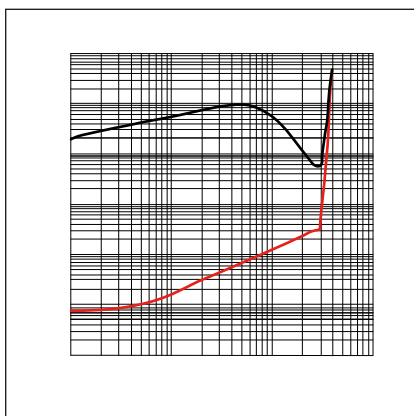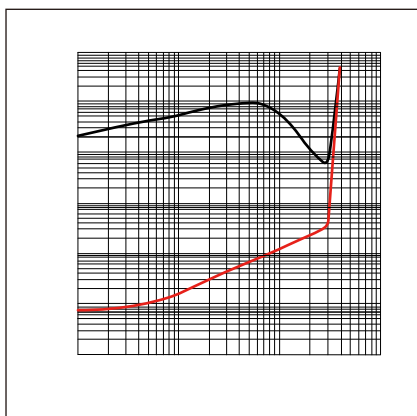

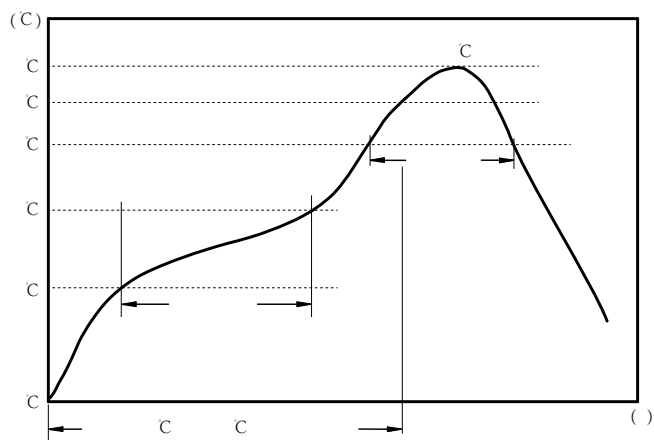


C
C
C

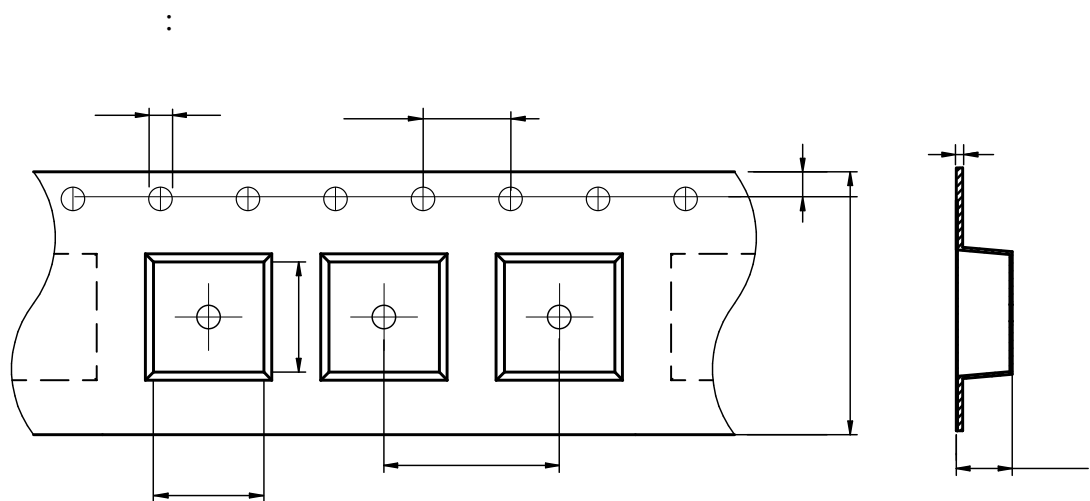





SCM9040	5.85±0.1	9.60±0.1	1.5±0.1	4.0±0.1	8.0±0.1	16.0±0.3	4.92±0.1	1.75±0.1	0.50±0.05

Marking	Printing (Inductance)
---------	-----------------------

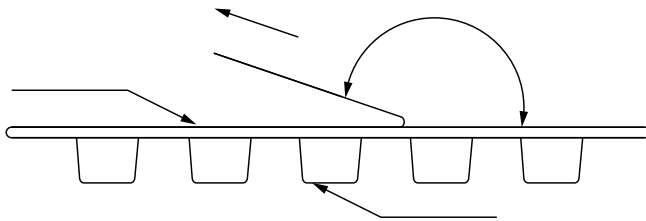


The peel force of top cover tape shall be between 0.1 to 1.17 N


:

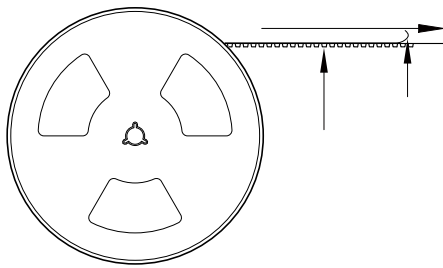

1500 Pcs/Reel



3 Reel /Inner box(4500 Pcs)



3 Inner box/Carton box(13.5K Pcs)

:

•

•

•

•

•

•

•

•

•

•

•

•

•