

WWCI Series

SMD Wire Wound Ceramic Inductor

Size 1008




CHARACTERISTICS

-
-
-
-


APPLICATION

-

Dimensions: [mm]

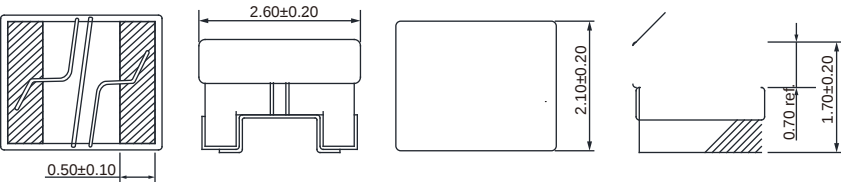

Land Pattern: [mm]



Electrical Properties:

		Condition			Condition		(Ω)	
			±5%					
			±5%					
			±5%					
			0%					
			±5%					
			0%					
			±5%					
			0%					
			±5%					
			0%					
			±5%					
			0%					
			±5%					
			0%					
	33		±5%					


		Condition			Condition		(Ω)	
	33		%					
			±5%					
			%					
			±5%					
			%					
			±5%					
			%					
			±5%					
			%					
			±5%					
			%					
			±5%					
			%					
			±5%	45				
			%	45				
			±5%	45				
			%	45				
			±5%	45				
			%	45				
			±5%	45				
			%	45				
			±5%	45				
			%	45				
			±5%	45				
			%	45				
			±5%	45				
			%	45				
			±5%	45				
			%	45				
			±5%	45				
			%	45				
			±5%	45				
			%	45				
			±5%	45				
			%	45				
			±5%	35				
			%	35				

℃



Typical Electrical Characteristics:

Inductance VS. Frequency Characteristics:

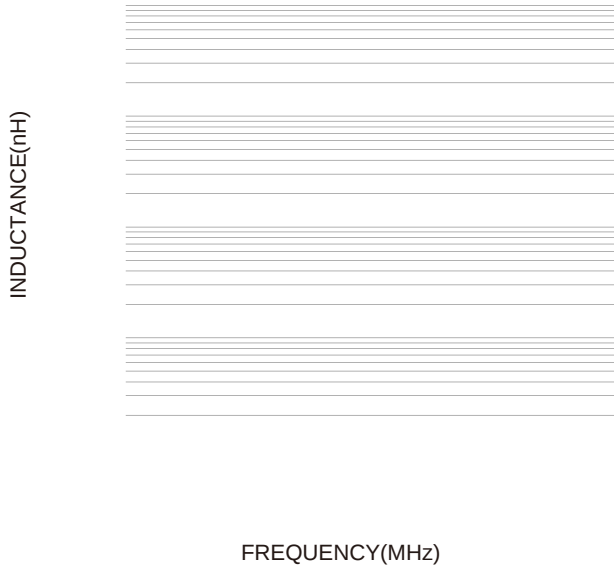

Temperture Rise VS. Frequency Characteristics:

